For Your Convenience: This File Is Shared By Diesel Parts Direct



YOUR ONE STOP SUPERSTORE FOR DIESEL ENGINE PARTS

SHOP NOW



Dump Valves DVU Series



Features

- For Separators/Scrubbers to 2000 psi (13.8 MPa) [138 bar] Working Pressure
- Hex Union Allows Plug and Seat Replacement Without Piping Removal
- Operates on 30–70 psi (207–483 kPa) [2.07-4.83 bar] Control Pressure
- Compatible With Murphy Level Controls
- Soft Seat Valve
- Manual Valve Operator


The DVU Series are pneumatically controlled dump valves. The valves open and close automatically by pneumatic control from a Murphy level controller and dump valve operator. Diaphragm actuated, the DVU series dump valves operate at 30-70 psi (207-483 kPa) [2.07-4.83 bar] and up to 2000 psi (13.8 MPa) [138 bar] vessel pressure (depending on the model).

A key benefit of this design is a hex union that provides the ability to replace the seat without removing the valve from

Application


Designed for gas compressor scrubbers, the DVU Series can be used to dump any liquids compatible with its materials of construction.


Dimensions




Model	DVU2120	DVU2115	DVU2105	DVU175	DVU150
Α	7.50 (191)	7.50 (191)	7.50 (191)	7.50 (191)	7.50 (191)
В	8.0 (203)	8.0 (203)	8.0 (203)	6.75 (171)	6.75 (171)
С	2.75 (70)	2.75 (70)	2.75 (70)	2.06 (52)	2.06 (52)
D	1.0 (25)	1.0 (25)	1.0 (25)	1.0 (25)	1.0 (25)
E	2-11.5 NPT	2-11.5 NPT	2-11.5 NPT	1-11.5 NPT	1-11.5 NPT
F	1-11.5 NPT	1-11.5 NPT	1-11.5 NPT	3/4"-14 NPT	1/2"-14 NPT
G	1.03	1.03	1.03	1.03	1.03

NOTE: Dimensions are in inches and (millimeters).







Specifications

Operating Temperature: -30 to 250°F (-34.4 to +121°C) Valve Operating Pressure: See chart (bottom pg 1).

Maximum Working Pressure:

DVU150 and DVU175: 1800 psi (12.4 MPa) [124 bar]. **DVU2105:** 500 psi (3.44 MPa) [34 bar]. **DVU2115:** 1500 psi (10.3 MPa) [103 bar]. DVU2120: 2000 psi (13.8 MPa) [138 bar].

Body Material: Electroless Nickel Plated 12L14 Carbon Steel. Internal Wetted Parts:

Plug Seal: 90 Durometer Urethane.

Other: 303 stainless steel; Electroless Nickel Plated 12L14 Carbon

Replacement Parts

Part No. Description

DVU2120

55-00-0237 55-00-0236 Seal Kit (includes plug) Diaphragm Kit 55-00-0255 Seal Kit (less seat)

DVU2115

55-00-0241 Seal Kit (includes plug) 55-00-0240 55-00-0255 Diaphragm Kit Seal Kit (less seat)

DVU2105

55-00-0245 Seal Kit (includes plug) 55-00-0244 Diaphragm Kit 55-00-0255 Seal Kit (less seat) DVU175 55-00-0230 Seal Kit (includes plug) 55-00-0231

Diaphragm Kit Seal Kit (less seat) 55-00-0255

DVU150

55-00-0230 Seal Kit (includes plug) 55-00-0231 Diaphragm Kit 55-00-0255 Seal Kit (less seat)

DVU150

55-00-0230 Seal Kit (includes plug) Diaphragm Kit Seal Kit (less seat) 55-00-0231 55-00-0255

Typical Seal Kit includes: Nut, Washer (1 to 3), "O" Ring, Plug and Seal, Seat, rush Washer.

Typical Seal Kit without seat includes: PN 55-00-0255 Seal kit, DVU 150/175 (less seat) Note: 10 each of included parts for bulk repairs.

Typical Diaphragm Repair Kit includes: Diaphragm, Diaphragm Washer (upper),

Diaphragm Nut, Diaphragm Plate (1 or 2 pcs), Packing, "O" Ring, Stem, Seal Washer for Maintenance Bolt.

Shipping Weights DVU150 and DVU175: 9 lbs. (4 kg.). **DVU150SS and DVU175SS:** 9 lbs. (4 kg.) DVU2105, DVU2115, DVU2120: 14 lbs. (6.4 kg.)

Shipping Dimensions 8 x 8 x 12 in. (203 x 203 x 305 mm.).

Scrubber Level Systems (SLS)

(Includes LS200, LS200NDVOR and DVU valve)


SLS2120: Includes DVU2120 valve SLS2115: Includes DVU2115 valve SLS2105: Includes DVU2105 valve SLS175: Includes DVU175 valve SLS150: Includes DVU150 valve -LR: Less Regulator option

(Includes MSL-020, LS200NDVOR and DVU valve)

MSLS2120: Includes DVU2120 valve MSLS175: Includes DVU175 valve MSLS150: Includes DVU150 valve -LR: Less Regulator option

How to Order Specify model number:

Model	Inlet	Outlet	Trim Size	Working Max. Press.
DVU2120	2 NPT	1 NPT	0.436 in. (11 mm)	2000 psi.
DVU2115	2 NPT	1 NPT	0.576 in. (15 mm)	1500 psi.
DVU2105	2 NPT	1 NPT	0.859 in. (22 mm)	500 psi.
DVU175	1 NPT	3/4 NPT	0.359 in. (9 mm)	1800 psi.
DVU175SS	1 NPT	3/4 NPT	0.359 in. (9 mm)	1800 psi.
DVU150	1 NPT	1/2 NPT	0.359 in. (9 mm)	1800 psi.
DVU150SS	1 NPT	1/2 NPT	0.359 in. (9 mm)	1800 psi.

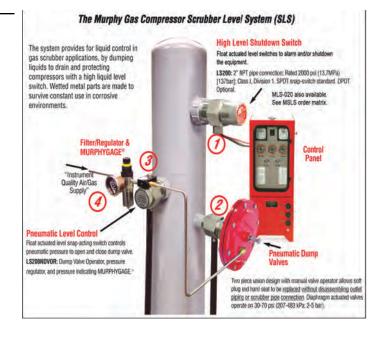

ENOVATION CONTROLS GLOBAL HEADQUARTERS

5311 S 122ND EAST AVENUE TULSA, DK 74146

ENOVATION CONTROLS - SAN ANTONIO OFFICE 5757 FARINON DRIVE SAN ANTONIO. TX 78249

ENOVATION CONTROLS - HOUSTON OFFICE

105 RANDON DYER RD ROSENBERG, TX 77471

FW MURPHY, LTD. - UNITED KINGDOM

CHURCH ROAD LAVERSTOCK SALISBURY SP1 10Z UK

MURPHY ECONTROLS TECHONOLOGIES (HANGZHOU) CO, LTD.

77 23RD STREET

HANGZHOU EGONOMIC & TECHOLOGICAL DEVELOPMENT AREA HANGZHOU, ZHEJIANG 310018 CHINA

DOMESTIC SALES & SUPPORT

ECONTROLS PRODUCTS

PHONE: 210 495 9772 FAX: 210 495 9791 EMAIL: INFO@ECONTROLS.COM WWW ECONTROLS COM

MURPHY PRODUCTS

PHONE: 918 317 4100 FAX: 918 317 4266 FMAIL: SALES@FWMURPHY COM WWW.FWMURPHY.COM

MURPHY CONTROL SYSTEMS & SERVICES

PHONE: 281 633 4500 FAX: 281 633 4688 EMAIL: CSS-SQLUTIONS@FWMURPHY.COM

MURPHY INDUSTRIAL PANEL DIVISION

PHONE: 918 317 4100 FAX: 918 317 4124

EMAIL: IPDSALES@FWMURPHY.COM.

INTERNATIONAL SALES & SUPPORT

UNITED KINGDOM

PHONE: +44 1722 410055 FAX: +44 1722 410088 EMAIL: SALES@FWMURPHY.CO.UK WWW.FWMURPHY.CO.UK

CHINA

PHONE: +86 571 8788 6060 FAX: +86 571 8684 8878 EMAIL: APSALES@FWMURPHY.COM

LATIN AMERICA & CARIBBEAN

EMAIL LASALES@FWMURPHY.COM

SOUTH KOREA

PHONE: +82 70 7951 4100 EMAIL: SKOREASALES@FWMURPHY.COM

PHONE: +91 91581 37633 EMAIL: INDIASALES@FWMURPHY.COM ISO 9001



UKA (TULSA) - ISO 9001:2008 FM 28221 UNA (ROSENBERG) - 150 8001:2008 FM 70221 UK-ISO 9001: ZDON FM 25422 CHINA-IND 9801-7809 FM 1(7305

Printed in the USA